


## Cascading Strainer Model 290 Separate Solids from Liquids




**Separation 100 to 2000 micron**  
**Available with or without debris catcher**  
**Construction:**

**Body: Carbon steel with epoxy paint**  
**Optional 304SS or 316 SS**

**Screen: Wedgewire 316L SS**

**Stand: Carbon steel with epoxy paint**  
**Optional 304SS or 316 SS**

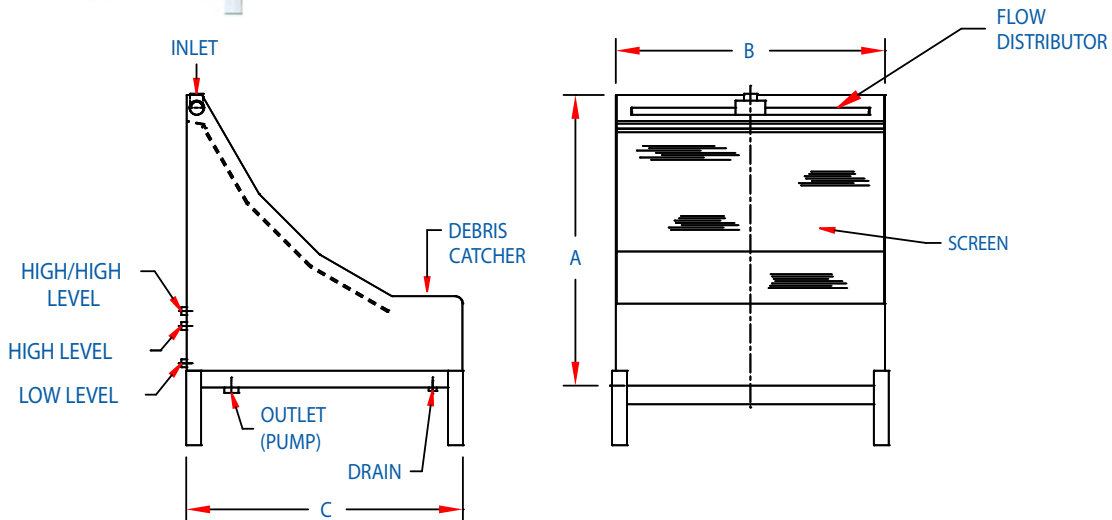

Model No.	A (in.)	B (in.)	C (in.)	INLET	OUTLET	DRAIN	FLOW (MAX)
290-010025	39" 991 mm	37" 940 mm	38" 966 mm	1" NPT	1 1/4" NPT	1/2"	25 GPM
290-020100	71" 1804 mm	37" 940 mm	67" 1702 mm	2" NPT	2" NPT	1"	100 GPM
290-030250	77" 1956 mm	73" 1855 mm	67" 1702 mm	3" - 150# FLG	3" - 150# FLG	1"	250 GPM
290-040400	77" 1956 mm	73" 1855 mm	67" 1702 mm	4" - 150# FLG	4" - 150# FLG	1"	400 GPM

Dimensions subject to change without notice, apply for certified drawings.

**"Engineered Products for Demanding Applications, Performance, and Service"**